Intimo
Canopy hood

2 YEAR
GUARANTEE

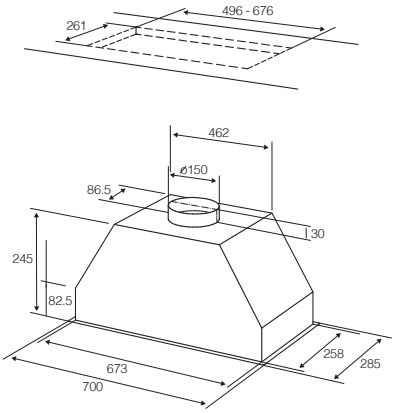

Features

Designed for ducting out or recycling

- The intelligent ASC system, see page 66
- Size: 70 x 28.5cm
- Cut out size: 67.6 x 26.1cm
- 2 x halogen lamps 20 watts
- Suitable for use with 90cm and 100cm range cookers

When recycling you will require

- Recycling charcoal filters – 190 x 2

When ducting out you will require

- Ducting outlet size 150mm (diameter)

Speed	1	2	3
Air capacity cubic metres per hour*	285	600	700
Noise level - dbA**	50	67	70

Energy efficiency	A	B	C	D
Class			•	

Size options

Available in 70cm

Colour options

Stainless steel

ASC

Advanced Sensor Control

ASC hoods are fitted with a sensor that detects steam, vapours, smoke and odours generated by cooking. This makes the hood fully automatic and no manual intervention is required.

When the sensor no longer detects odours, steam or smoke the hood continues to operate for a further few minutes to ensure all residual odours have been eliminated before turning itself off.

Further features of ASC include:

- The sensitivity level of the ASC System can be easily adjusted to suit your personal needs
- The ASC can temporarily be changed by hand
- The hood can be changed from ASC System to manual operation at the touch of a button

* Performance data according to Standard EN61591. Free air delivery.

**Noise level according to Standard IEC60704-2-13 method. All noise level – dbA figures are tested on ducted hoods.